


HUB TYPE

Tick (✓) One


MALE

FEMALE


SPECIFY SIZE BELOW




HEX _____ mm.



KEYWAY _____ mm.



BORE _____ mm.



SQ. BORE _____ mm.

PIN HOLE _____


TAPPED HOLE _____

OTHER _____

LENGTH L _____ mm.

BEARING SPAN B _____ mm.

BEARING CAP DIA. C _____ mm.

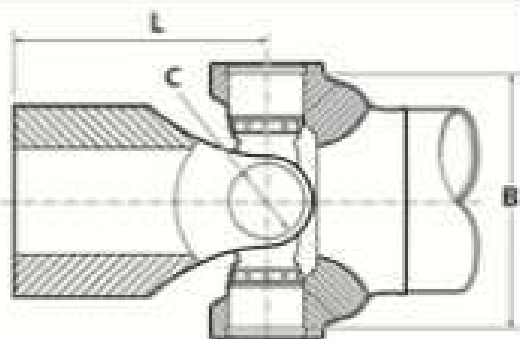

MINIMUM DISTANCE FROM CENTRE LINE TO NEAREST OBJECT

mm.

OFFSET BETWEEN DRIVING & DRIVEN ENDS

mm.

OPERATING ANGLE

0

OVERALL SHAFT LENGTH

MIN. _____ mm.

MAX. _____ mm.

FLANGE DETAILS

SPIGOT TYPE

Tick (✓) One

MALE

FEMALE

DIAMETER C

mm.

O/DIA. A

mm.

P.C.D. F

mm.

NO. HOLES

mm.

HOLE DIA.

mm.

HEIGHT H

mm.

4 HOLE FLANGE 6 HOLE FLANGE 8 HOLE FLANGE 12 HOLE FLANGE

